

Since 1968

COMMAX
SmartHome & Security

User Manual

Door Camera DRC-4CPN2



www.commax.com

COMMAX Co.,Ltd.



- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.




Contents

1. The names of Each Part
2. Wiring & Installation
3. Package
4. Specification




1. The names of Each Part

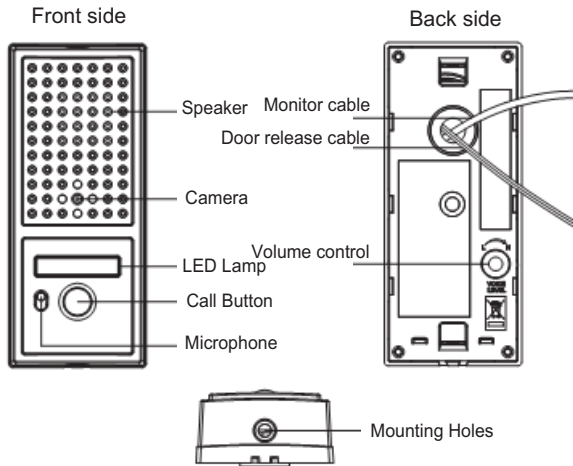



2. Wiring & Installation

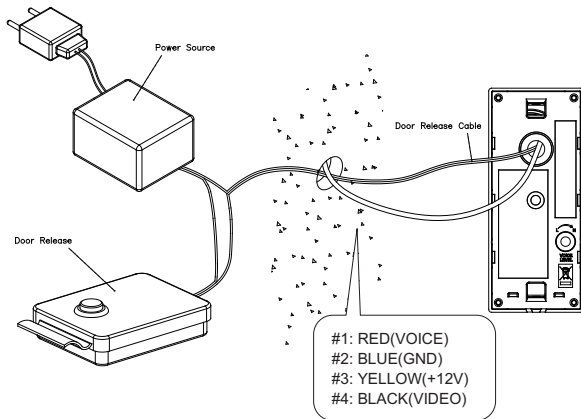

[FIG-3]

1. Align holes on the wall where the unit is to be installed with mounting brackets hole and secure.

FIG-1 : Install the camera at a 30° angle to the left (install the bracket in reverse to angle 30° to the right)


FIG-2 : Install the camera at a perpendicular angle to the front

2. Wire the household monitor cables as shown below with matched polarity as picture below[FIG-3]


(#1: RED/VOICE, #2: BLUE/GND, #3: YELLOW/DC12V, #4: BLACK/VIDEO)

3. Wire the door release cable as shown in the diagram.[FIG-3]

4. Tighten using bolts and a wrench, then cover using the AL. screw covers.

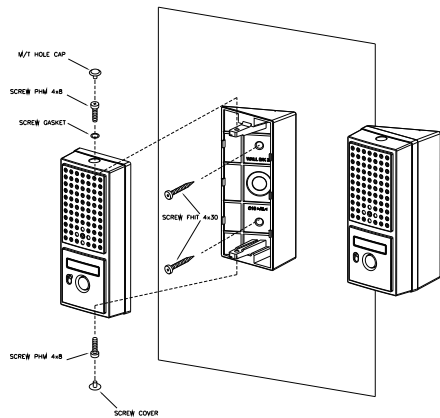


[FIG-1]

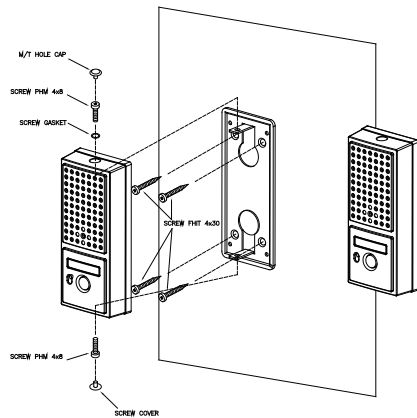


[FIG-2]

- You can adjust speaker volume using driver as shown below. [FIG-4]


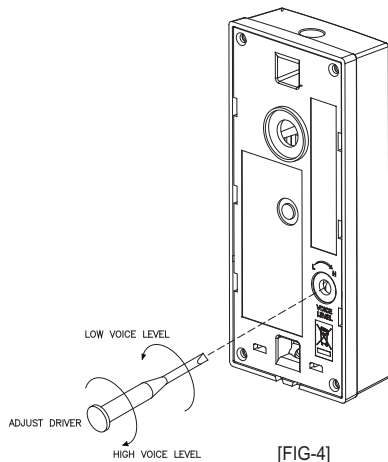


- Please refer to the below images regarding the installation position of the product.

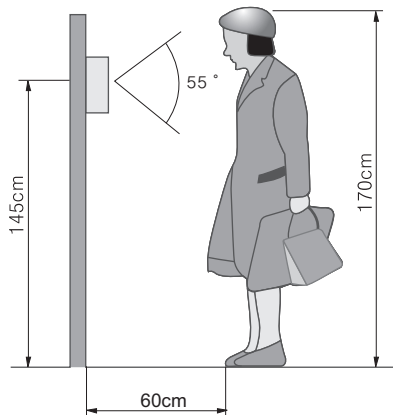






3. Package



M/T HOLE CAP




GASKET



SCREW PHM 4*8




SHEET VOLUME



SCREW FH1T 4*30



Manual



RUBBER WATERPROOF



4. Specification

specification \ Model	DRC-4CPN2
Image Sensor	CMOS 1/3"
Sensor Resolution	0.41 megapixel
Power source	12V \equiv (supplied from the Monitor)
Wiring(household)	Polar 4 wires
Call mode	Duplex
Camera angle	Horizontal angle 68° Vertical angle 55°
Format	NTSC or PAL STANDARD
Horizontal / vertical Frequency	15.734 KHz / 60 Hz or 15.625 KHz / 50 Hz
Lamp	Built-in white LED (automatically turns on in night)
Low illumination	0.1 LUX (Up to 300mm in front of the camera)
Workable temperature	-10℃ (tested up to -40℃) +50℃
Dimension(mm)	50(W) x 118 (H) x 25.5(D)
Weight(g)	250g (B/K included)



COMMAX Co.,Ltd.

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Int'l Business Dept. : Tel.; +82-31-7393-540~550 Fax.; +82-31-745-2133
Web site : www.commax.com