


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Feed Through Terminal : KUT 10N

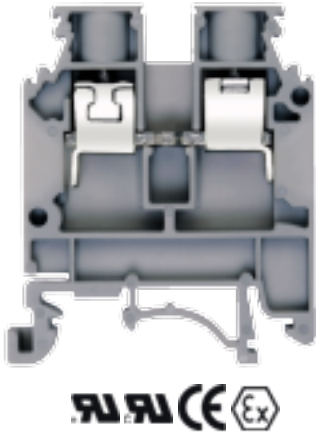

Type of Connection	MS Screw Clamp
Insulating Material	Polyamide 66
Terminal Pitch	10 mm (0.39 Inch)
Terminal Width	41.5 mm (1.62 Inch)
Terminal Height	51 mm (1.99 Inch)
Rated Cross Section	10 sq mm
Wire Stripping Length	10 mm
Screw Size	M4

Connection Possibility

Stranded wire	Max : 10 sq mm	Min : 1.5 sq mm
Solid wire	Max : 16 sq mm	Min : 1.5 sq mm

Ratings	IEC	UL
Voltage	1000 V	600 V
Current	63 A	65 A
Conductor Size	10 sq mm	Min : 16 AWG Max : 6 AWG
Tightening Torque	1.2 Nm	14 Lbln

Terminal Accessories

End Plate	KPXN
Partition Plate With Foot	KNBF 2.5/10
Protection Cover	PCK3
End Clamp	SCUN, SCUSL, SCUDD, SCKN
Cross Connection Link Assembly	CCLA10 - 2W
Marking Label	LABEL KN10
Group Marking Carrier	SCKNMLH, SCUNMLH
Terminal Colours	GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN
Mounting Channel	CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10