


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Feed Through Terminal : KUT 25



Type of Connection	MS Screw Clamp
Insulating Material	Polyamide 66
Terminal Pitch	12 mm (0.47 Inch)
Terminal Width	45 mm (1.76 Inch)
Terminal Height	56 mm (2.18 Inch)
Rated Cross Section	25 sq mm
Wire Stripping Length	15 mm
Screw Size	M5

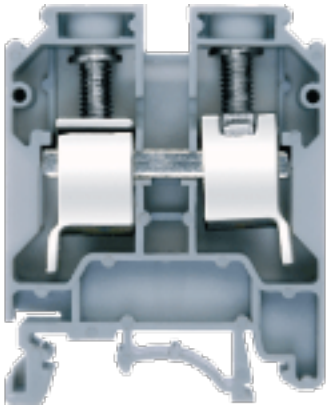

Connection Possibility

Stranded wire	Max : 25 sq mm	Min : 6 sq mm
Solid wire	Max : 25 sq mm	Min : 6 sq mm

Ratings	IEC	UL
Voltage	1000 V	600 V
Current	101 A	115 A
Conductor Size	25 sq mm	Min : 10 AWG Max : 2 AWG
Tightening Torque	2.3 Nm	20 Lbln

Terminal Accessories

End Plate	KPT
Partition Plate Without Foot	KBT
Partition Plate With Foot	KBZF
Protection Cover	PCK3
End Clamp	SCUN, SCUSL, SCUDD, SCKN, DCKN
Cross Connection Link Assembly	CCLA25 - 2W
Link for Removable Shorting	RSL25
Long Stud For Removable Shorting	LSR10-16
Marking Label	LABEL KN12
Warning Label	WARNING LABEL WL16
Group Marking Carrier	SCKNMLH, SCUNMLH, DCKNMLH
Terminal Colours	GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN
Mounting Channel	CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10