


# DST 2.5



## Approvals

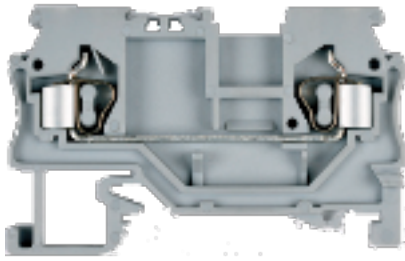

## General Data

Type	DST 2.5
Wire Termination Technology	Spring Clamp
Ratings	800 V/24 A/2.5 sq mm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	NA

## Dimensions & Weight

Height (mm)	33
Height (inches)	1.29
Width (mm)	53
Width (inches)	2.08
Thickness (mm)	5
Weight For Standard Packing Qty (Kg)	0.70

## Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

## Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	2.5
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	2.5

## Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	24
Rated Cross Section (sq mm)	2.5
Short Time Withstand Current (kA)	0.30
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

## Ratings-ATEX

Certificate No	500
Rated Current (A)	20
Rated Cross Section (sq mm)	2.5

## Ratings-CSA

Rated Voltage (V)	600
Rated Current (A)	15
Wire Cross Section - min (AWG)	20

## Accessories

### End Plate

#### DSEP2.5

Height : 26 mm

Width : 53 mm

Thickness : 2.50 mm



### End Clamp

#### DCKN (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 6 mm



#### DCKN10 (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 10 mm




#### SCKN (35 mm Rail Mounted)

Height : 35.50 mm

Width : 50.60 mm

Thickness : 8 mm



**SCUN (Universal Rail Mounted)**

**Height : 35.50 mm**

**Width : 50.60 mm**

**Thickness : 9.50 mm**



**Screwless Push-in type shorting link**

**SSL 2.5**

**( 2W )**



**Marking Label**

**LABEL KN5**



**Group Marking Carrier**

**DCKNMLH**

**Height : 45.50 mm**

**Width : 43.50 mm**

**Thickness : 6 mm**



**SCKNMLH**

**Height : 45.50 mm**

**Width : 48 mm**

**Thickness : 8 mm**





<p><b>GMH 10</b></p> <p>Height : 51 mm</p> <p>Width : 41.50 mm</p> <p>Thickness : 10 mm</p>	
<p><b>GMH 20</b></p> <p>Height : 51 mm</p> <p>Width : 41.50 mm</p> <p>Thickness : 20 mm</p>	

Note : Technical specifications may change in line with technical advances and industry standards