


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Feed Through Terminal : KUDD 4N

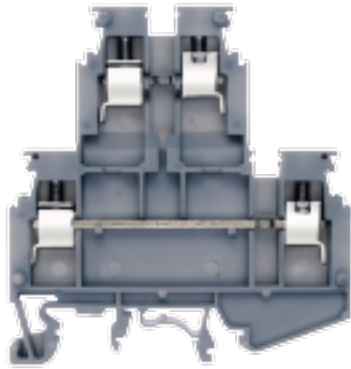

| | |
|------------------------------|----------------------|
| Type of Connection | MS Screw Clamp |
| Insulating Material | Polyamide 66 |
| Terminal Pitch | 6 mm (0.23 Inch) |
| Terminal Width | 62.5 mm (2.44 Inch) |
| Terminal Height | 65.4 mm (2.55 Inch) |
| Rated Cross Section | 4 sq mm |
| Wire Stripping Length | 9 mm |
| Screw Size | M3 |

Connection Possibility

| | | |
|----------------------|-----------------|-----------------|
| Stranded wire | Max : 2.5 sq mm | Min : 0.5 sq mm |
| Solid wire | Max : 4 sq mm | Min : 0.5 sq mm |

| Ratings | IEC | UL |
|-------------------|---------|------------------------------|
| Voltage | 630 V | 300 V |
| Current | 28 A | 20 A |
| Conductor Size | 4 sq mm | Min : 20 AWG Max : 12 AWG |
| Tightening Torque | 0.5 Nm | 7 LbIn |

Terminal Accessories

| | |
|---------------------------------------|---|
| End Clamp | SCUN, SCUSL, SCUDD, SCKN |
| Cross Connection Link Assembly | CCLK2.5 - 2W |
| Group Marking Carrier | SCKNMLH, SCUNMLH |
| Terminal Colours | GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN |
| Mounting Channel | CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10 |