


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Disconnecting Terminal : KUTSD 6



Type of Connection	MS Screw Clamp
Insulating Material	Polyamide 66
Terminal Pitch	8 mm (0.31 Inch)
Terminal Width	65 mm (2.54 Inch)
Terminal Height	47 mm (1.83 Inch)
Rated Cross Section	6 sq mm
Wire Stripping Length	12 mm
Screw Size	M3.5

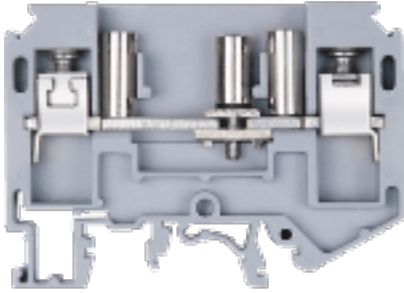

Connection Possibility

Stranded wire	Max : 6 sq mm	Min : 0.5 sq mm
Solid wire	Max : 10 sq mm	Min : 0.5 sq mm

Ratings	IEC	UL
Voltage	800 V	600 V
Current	38 A	35 A
Conductor Size	6 sq mm	Min : 20 AWG Max : 8 AWG
Tightening Torque	1.4 Nm	12 Lbln

Terminal Accessories

End Plate	KPSD
End Clamp	SCUN, SCUSL, SCUDD, SCKN, DCKN
Comb-type Shorting Link	SLC6 - 2W
Marking Label	LABEL KN8
Group Marking Carrier	SCKNMLH, SCUNMLH, DCKNMLH
Terminal Colours	GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN
Mounting Channel	CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10