




PRODUCT DATASHEET


KBM-HQ

CaP System
BNC MALE CONNECTOR
HIGH QUALITY: R. L. > 30 dB

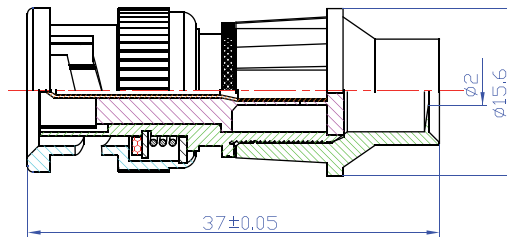


Use these Tools

Stripping Dimension:

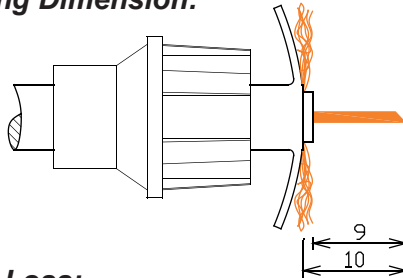

Return Loss:

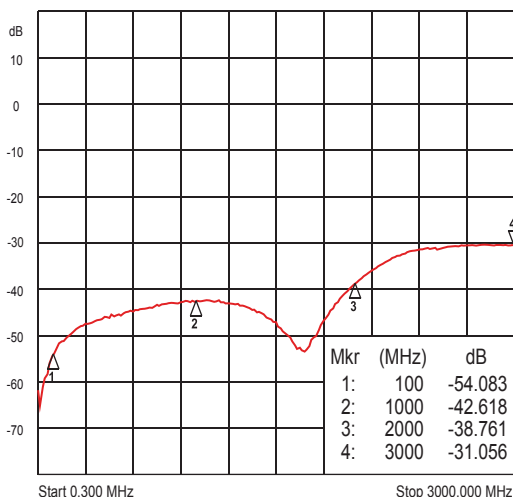

Suitable for Cables:

RG6 quad, RG6, RG59, RG178, ... suitable for all cable with inner conductor from Ø 0,3 up to Ø 1,1 mm (from AWG 28 to AWG 18)

Electrical Specification

Impedance: 75 Ohm
 Frequency: 0-3 GHz
 Return Loss: > 30 db @ 3 GHz
 Dielectric W/V: 500 Veff
 Insulation res: 5000 M-Ohm
 Screening Immunity: Class A+

Mechanical Specification

Body Material: Brass - Gold plated
 Center Contact: Beryllium Copper - Gold plat.
 Insulator: HDPE
 Bayonet Cap: Zinc - Black Nickel plated
 Gasket: Rubber
 Washer: Fe - Nickel plated
 Spring: SK5 - Nickel plated
 Inner Retaining Ring: Fe - Nickel plated
 CaP®: Protected Plastic Compound
 Weight: 9.8 g

Environmental Specification

Operating Temp: - 40 ÷ + 120 °C