


# DBK 150-25 1X4



## Approvals

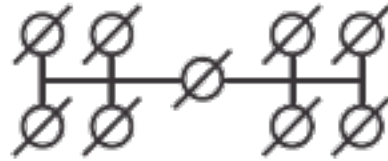

## General Data

Type	DBK 150-25 1X4
Wire Termination Technology	Screw Clamp
Ratings	800 V/IC-309 A, OG - 101 A/IC-150 sq mm, OG-25 sq/IC-1.4 Nm,OG-2.3 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	6
Country of Origin	India
Screw Size	M5

## Dimensions & Weight

Height (mm)	74
Height (inches)	002.91
Width (mm)	45
Width (inches)	1.77
Thickness (mm)	86
Weight For Standard Packing Qty (Kg)	2.50

## Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

## Rated Conductor Size

Stranded Wire - min (sq mm)	IC-50 , OG-6
Stranded Wire - max (sq mm)	IC-150 , OG-25
Solid Wire - min (sq mm)	IC-50 , OG-6
Solid Wire - max (sq mm)	IC-150 , OG-25

## Ratings - IEC


Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	IC-309 , OG-101
Rated Cross Section (sq mm)	IC-150 , OG-25
Short Time Withstand Current (kA)	18
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

## Accessories

### Partition Plate Without Foot

KBT

Thickness : mm



### Partition Plate With Foot



