

TCREL type Heat-shrinkable thin wall flexible hoses

FEATURES & BENEFITS



Termokurczliwe, cienkościenne.

Typ: średnica wewnętrzna w stanie dostawy / średnica wewnętrzna po skurczu.

MECHANICAL DATA

Material	Cross-linked polyethylene, flame retardant
Recommended shrinking temperature [°C]	+90
Working temperature [°C]	-30 ÷ +70
Shrinkage factor	> 50 %

ELECTRICAL DATA


Breakdown strength, above [kV/mm]	12
-----------------------------------	----

DIMENSIONS

Length [m]	1
------------	---

NOTE!

Pozostałe kolory - szczegóły na www.ergom.com

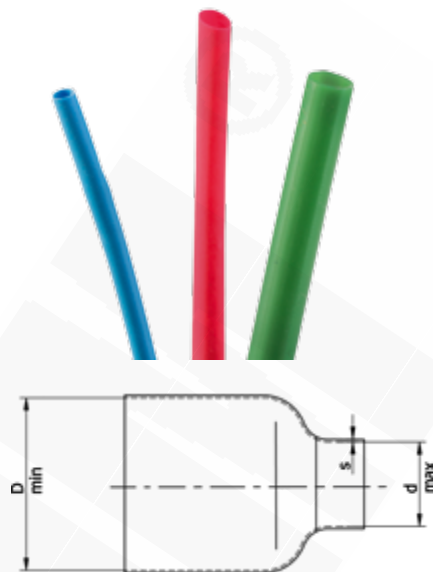

Type	Index Ergom	Colour	Inside diameter in delivery state - D [mm]	Internal diameter full shrinkage - d [mm]	Wall thickness on full shrinkage - s [mm]	Available packages [szt.]
TCREL 1,6/0,8 BK	E05ME-01010300101	black	1,6	0,8	0,33	1
TCREL 1,6/0,8 BK (10)	E05ME-01010300103	black	1,6	0,8	0,33	10
TCREL 1,6/0,8 BL	E05ME-01010300201	blue	1,6	0,8	0,33	1
TCREL 1,6/0,8 GR	E05ME-01010300401	green	1,6	0,8	0,33	1
TCREL 1,6/0,8 RD	E05ME-01010300301	red	1,6	0,8	0,33	1
TCREL 2,4/1,2 BK	E05ME-01010300501	black	2,4	1,2	0,44	1
TCREL 2,4/1,2 BK (10)	E05ME-01010300503	black	2,4	1,2	0,44	10
TCREL 2,4/1,2 BL	E05ME-01010300601	blue	2,4	1,2	0,44	1
TCREL 2,4/1,2 CL	E05ME-01010300901	transparent	2,4	1,2	0,44	1
TCREL 2,4/1,2 RD	E05ME-01010300701	red	2,4	1,2	0,44	1
TCREL 2,4/1,2 WT	E05ME-01010300801	white	2,4	1,2	0,44	1
TCREL 3,2/1,6 BK	E05ME-01010301001	black	3,2	1,6	0,44	1
TCREL 3,2/1,6 BK (10)	E05ME-01010301003	black	3,2	1,6	0,44	10
TCREL 3,2/1,6 BL	E05ME-01010301101	blue	3,2	1,6	0,44	1
TCREL 3,2/1,6 GR	E05ME-01010301401	green	3,2	1,6	0,44	1
TCREL 3,2/1,6 RD	E05ME-01010301201	red	3,2	1,6	0,44	1
TCREL 3,2/1,6 WT	E05ME-01010301301	white	3,2	1,6	0,44	1
TCREL 3,2/1,6 YL	E05ME-01010301501	yellow	3,2	1,6	0,44	1
TCREL 3,2/1,6 YL-GR	E05ME-01010301601	yellow-green	3,2	1,6	0,44	1
TCREL 4,0/2,0 BK	E05ME-01010301701	black	4,0	2,0	0,44	1
TCREL 4,0/2,0 BK (10)	E05ME-01010301703	black	4,0	2,0	0,44	10
TCREL 4,0/2,0 BL	E05ME-01010301801	blue	4,0	2,0	0,44	1
TCREL 4,0/2,0 GR	E05ME-01010302001	green	4,0	2,0	0,44	1
TCREL 4,0/2,0 RD	E05ME-01010301901	red	4,0	2,0	0,44	1

Type	Index Ergom	Colour	Inside diameter in delivery state - D [mm]	Internal diameter full shrinkage - d [mm]	Wall thickness on full shrinkage - s [mm]	Available packages [szt.]
TCREL 4,0/2,0 YL	E05ME-01010302101	yellow	4,0	2,0	0,44	1
TCREL 4,0/2,0 YL-GR	E05ME-01010302201	yellow-green	4,0	2,0	0,44	1
TCREL 4,8/2,4 BK	E05ME-01010302301	black	4,8	2,4	0,5	1
TCREL 4,8/2,4 BK (10)	E05ME-01010302303	black	4,8	2,4	0,5	10
TCREL 4,8/2,4 BL	E05ME-01010302401	blue	4,8	2,4	0,5	1
TCREL 4,8/2,4 CL	E05ME-01010302701	transparent	4,8	2,4	0,5	1
TCREL 4,8/2,4 RD	E05ME-01010302501	red	4,8	2,4	0,5	1
TCREL 4,8/2,4 YL-GR	E05ME-01010302601	yellow-green	4,8	2,4	0,5	1
TCREL 6,4/3,2 BK	E05ME-01010302801	black	6,4	3,2	0,56	1
TCREL 6,4/3,2 BK (10)	E05ME-01010302803	black	6,4	3,2	0,56	10
TCREL 6,4/3,2 BL	E05ME-01010302901	blue	6,4	3,2	0,56	1
TCREL 6,4/3,2 CL	E05ME-01010303301	transparent	6,4	3,2	0,56	1
TCREL 6,4/3,2 GR	E05ME-01010303101	green	6,4	3,2	0,56	1
TCREL 6,4/3,2 RD	E05ME-01010303001	red	6,4	3,2	0,56	1
TCREL 6,4/3,2 YL-GR	E05ME-01010303201	yellow-green	6,4	3,2	0,56	1
TCREL 8,0/4,0 BK	E05ME-01010303401	black	8,0	4,0	0,56	1
TCREL 8,0/4,0 BK (10)	E05ME-01010303403	black	8,0	4,0	0,56	10
TCREL 8,0/4,0 BL	E05ME-01010303501	blue	8,0	4,0	0,56	1
TCREL 8,0/4,0 CL	E05ME-01010303701	transparent	8,0	4,0	0,56	1
TCREL 8,0/4,0 YL-GR	E05ME-01010303601	yellow-green	8,0	4,0	0,56	1
TCREL 9,5/4,8 BK	E05ME-01010303801	black	9,5	4,8	0,56	1
TCREL 9,5/4,8 BK (10)	E05ME-01010303803	black	9,5	4,8	0,56	10
TCREL 9,5/4,8 BL	E05ME-01010303901	blue	9,5	4,8	0,56	1
TCREL 9,5/4,8 CL	E05ME-01010304301	transparent	9,5	4,8	0,56	1
TCREL 9,5/4,8 GR	E05ME-01010304101	green	9,5	4,8	0,56	1
TCREL 9,5/4,8 YL-GR	E05ME-01010304201	yellow-green	9,5	4,8	0,56	1
TCREL 12,7/6,4 BK	E05ME-01010305801	black	12,7	6,4	0,68	1
TCREL 12,7/6,4 BK (10)	E05ME-01010305803	black	12,7	6,4	0,68	10
TCREL 12,7/6,4 CL	E05ME-01010306201	transparent	12,7	6,4	0,68	1
TCREL 12,7/6,4 RD	E05ME-01010306001	red	12,7	6,4	0,68	1
TCREL 12,7/6,4 YL-GR	E05ME-01010306101	yellow-green	12,7	6,4	0,68	1
TCREL 19/9,5 BK	E05ME-01010306301	black	19,0	9,5	0,78	1
TCREL 19/9,5 BK (10)	E05ME-01010306303	black	19,0	9,5	0,78	10
TCREL 19/9,5 CL	E05ME-01010306701	transparent	19,0	9,5	0,78	1
TCREL 19/9,5 RD	E05ME-01010306501	red	19,0	9,5	0,78	1
TCREL 19/9,5 YL-GR	E05ME-01010306601	yellow-green	19,0	9,5	0,78	1
TCREL 25,4/12,7 BK	E05ME-01010304401	black	25,4	12,7	0,90	1
TCREL 25,4/12,7 BK (5)	E05ME-01010304403	black	25,4	12,7	0,90	5
TCREL 25,4/12,7 BL	E05ME-01010304501	blue	25,4	12,7	0,90	1
TCREL 25,4/12,7 RD	E05ME-01010304601	red	25,4	12,7	0,90	1
TCREL 25,4/12,7 YL	E05ME-01010304701	yellow	25,4	12,7	0,90	1
TCREL 38/19 BK	E05ME-01010304901	black	38,0	19,0	1,1	1
TCREL 38/19 BK (5)	E05ME-01010304903	black	38,0	19,0	1,1	5
TCREL 38/19 BL	E05ME-01010305001	blue	38,0	19,0	1,1	1
TCREL 38/19 RD	E05ME-01010305101	red	38,0	19,0	1,1	1
TCREL 38/19 YL	E05ME-01010305201	yellow	38,0	19,0	1,1	1
TCREL 38/19 YL-GR	E05ME-01010305301	yellow-green	38,0	19,0	1,1	1
TCREL 51/25,5 BK	E05ME-01010305401	black	51	25,5	1,15	1
TCREL 51/25,5 BK (5)	E05ME-01010305403	black	51	25,5	1,15	5
TCREL 51/25,5 CL	E05ME-01010305501	transparent	51	25,5	1,15	1
TCREL 76/38 BK	E05ME-01010305601	black	76,0	38,0	1,25	1
TCREL 76/38 BK (5)	E05ME-01010305603	black	76,0	38,0	1,25	5
TCREL 76/38 CL	E05ME-01010305701	transparent	76,0	38,0	1,25	1