

GRL-22

0

"POWER LIGHT"



	(LED 2)	
	220-240V AC/50-60Hz	
	16VA	
A (Pb)	12V/7Ah	
-	LED	LED μ (TEST)
		<24
		600
	LED	
	710lm	
	IP42	
	EN 60598-1, EN 60598-2-22, 55015, 61547, 61000-3-2, 61000-3-3	
	5 40 °C	
	μ 95%	
	Bayblend FR3010, polycarbonate	
	302 x 103 x 230 mm	
	3400gr.	
	3	(1 μ)

Olympia Electronics

(ta 40°C)

LED power charge power

power charge ST,

3"

TEST, 100%, 50%, 33%

charge power. charge

charge


1. !!!

μ : LED= μ

X: μ μ μ μ μ
 0: μ μ μ μ μ (*
 A:
 G:

600: μ 600 min
 () TEST.



1. μ 2
2. μ
3. μ (μ 3)
4. μ 5

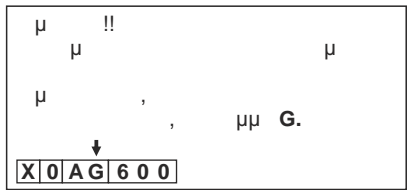

(*) _____ : μ , μ



LED	
	GRL-22
	Olympia Electronics . . .
μ μ	3011129
μ	20,3-25,2V
	5,46W
μ	μ LED
μ (tc)	50 °C μ

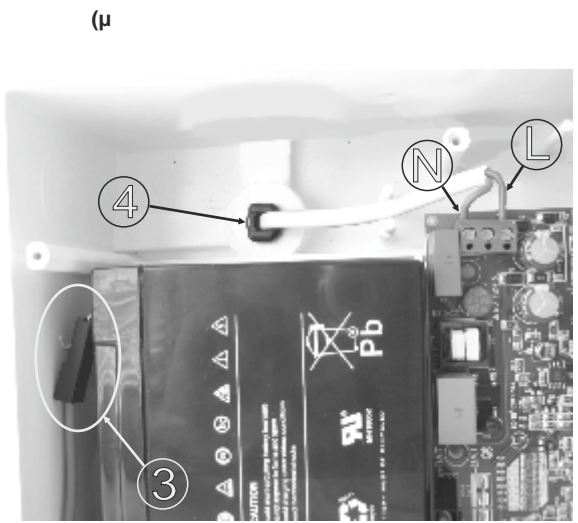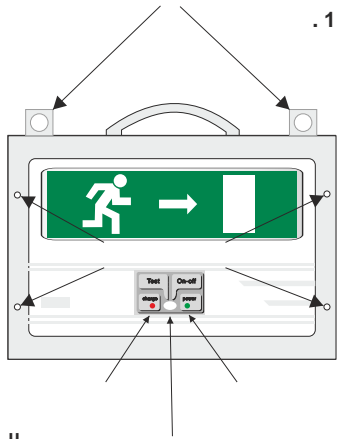

(Test)

1. (. 1).
 2. 4
 3. (. 1).
 4. (μ (-) (+)).
 5. (μ 1Nm). μ L
- !! μ 24

Olympia Electronics

Olympia Electronics,

Olympia Electronics

Olympia Electronics

Olympia Electronics

Olympia Electronics

72° μ
 . . 60300 . . 06
www.olympia-electronics.gr
info@olympia-electronics.gr