


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Feed Through Terminal : KUT 4N

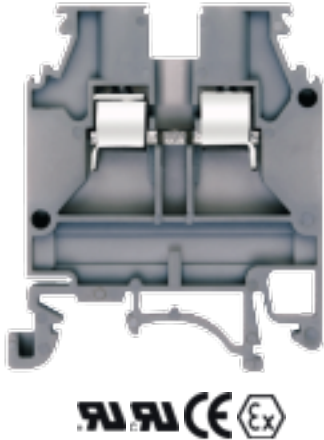

Type of Connection	MS Screw Clamp
Insulating Material	Polyamide 66
Terminal Pitch	6 mm (0.23 Inch)
Terminal Width	41.5 mm (1.62 Inch)
Terminal Height	51 mm (1.99 Inch)
Rated Cross Section	4 sq mm
Wire Stripping Length	12 mm
Screw Size	M3

Connection Possibility

Stranded wire	Max : 4 sq mm	Min : 0.5 sq mm
Solid wire	Max : 4 sq mm	Min : 0.5 sq mm

Ratings	IEC	UL
Voltage	1000 V	600 V
Current	35 A	30 A
Conductor Size	4 sq mm	Min : 20 AWG Max : 10 AWG
Tightening Torque	0.5 Nm	6 LbIn

Terminal Accessories

Partition Plate With Foot	KNBF 2.5/10
Protection Cover	PCK3
End Clamp	SCUN, SCUSL, SCUDD, SCKN
Cross Connection Link Assembly	CCLA4N-2W
Comb-type Shorting Link	SLC4N-2W
Link for Removable Shorting	RSLDD
Long Stud For Removable Shorting	LSR6N
Marking Label	LABEL KN5.5
Group Marking Carrier	SCKNMLH, SCUNMLH
Terminal Colours	GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN
Mounting Channel	CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10