


Rail Mounted Terminal Blocks : Polyamide Range Of Terminals : Fuse Terminal : KUF 10

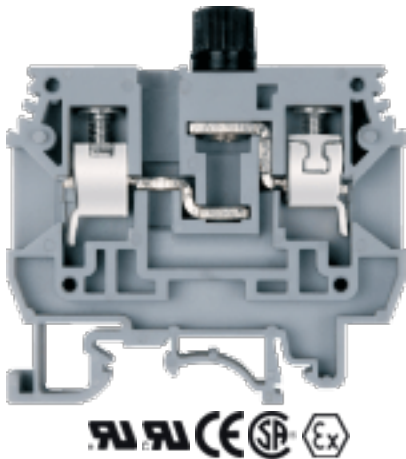

<b>Type of Connection</b>	MS Screw Clamp
<b>Insulating Material</b>	Polyamide 66
<b>Terminal Pitch</b>	12 mm ( 0.47 Inch)
<b>Terminal Width</b>	66 mm ( 2.57 Inch)
<b>Terminal Height</b>	55.75 mm ( 2.17 Inch)
<b>Rated Cross Section</b>	10 sq mm
<b>Wire Stripping Length</b>	10 mm
<b>Screw Size</b>	M4

**Connection Possibility**

<b>Stranded wire</b>	Max : 10 sq mm	Min : 0.5 sq mm
<b>Solid wire</b>	Max : 10 sq mm	Min : 0.5 sq mm

Ratings	IEC	UL
Voltage	1000 V	600 V
Current	12 A	12 A
Conductor Size	10 sq mm	Min : 18 AWG    Max : 6 AWG
Tightening Torque	1.4 Nm	12 Lbln

**Terminal Accessories**

<b>End Plate</b>	EPF
<b>Partition Plate With Foot</b>	KBZF
<b>End Clamp</b>	SCUN, SCUSL, SCUDD, SCKN, DCKN
<b>Marking Label</b>	LABEL KN12
<b>Group Marking Carrier</b>	SCKNMLH, SCUNMLH, DCKNMLH
<b>Terminal Colours</b>	GREY, KHAKHI, RED, YELLOW, BLUE, BLACK, GREEN
<b>Mounting Channel</b>	CHS10, CHK10, CHS3, CHS5, CHK5, CHK3, CHKS3, CHKS5, CHKS10, CHKDS10, CHKD10