

Single crimp insulated female connectors NI...B PCV type

FEATURES & BENEFITS



LOGISTIC DATA


Available packages 100

MECHANICAL DATA

Insulated polyvinyl chloride (PCV)
 Material brass
 Surface tin-plated
 Working temperature [°C] -5 ÷ +60

NOTE!

Connectors with insulation PA and PC available on order.

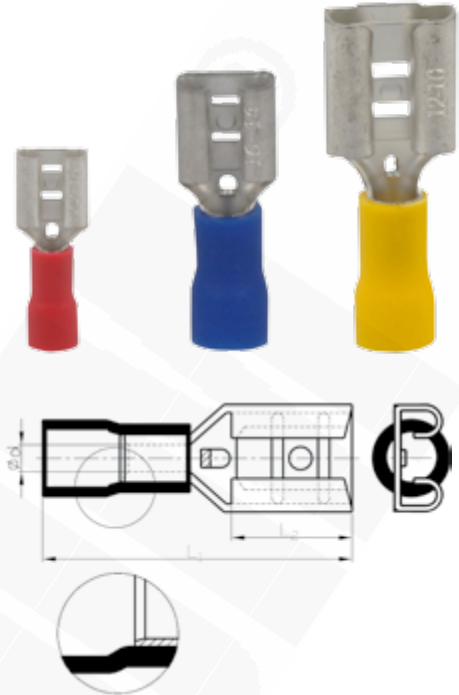

Type	Index Ergom	Cross section [mm²]	Insulation color	Size	d	L ₁	L ₂	Weights [kg]
NI 2,8-1/0,5 BPCV (100 SZT./PCS)	E10KN-03010200101	0,5+1	red	2,8x0,5	1,9	18,5	6,3	0.04
NI 2,8-1/0,8 BPCV (100 SZT./PCS)	E10KN-03010200201			2,8x0,8				
NI 4,8-1/0,5 BPCV (100 SZT./PCS)	E10KN-03010200501			4,8x0,5		20,5	8,0	
NI 4,8-1/0,8 BPCV (100 SZT./PCS)	E10KN-03010200601			4,8x0,8				
NI 6,3-1/0,8 BPCV (100 SZT./PCS)	E10KN-03010200901	6,3x0,8				0.07		
NI 2,8-2,5/0,5 BPCV (100 SZT./PCS)	E10KN-03010200301	1,5+2,5	blue	2,8x0,5	2,5	18,5	6,3	0.05
NI 2,8-2,5/0,8 BPCV (100 SZT./PCS)	E10KN-03010200401			2,8x0,8				
NI 4,8-2,5/0,5 BPCV (100 SZT./PCS)	E10KN-03010200701			4,8x0,5		20,5	8,0	
NI 4,8-2,5/0,8 BPCV (100 SZT./PCS)	E10KN-03010200801			4,8x0,8				
NI 6,3-2,5/0,8 BPCV (100 SZT./PCS)	E10KN-03010201001	6,3x0,8				0.08		
NI 6,3-6/0,8 BPCV (100 SZT./PCS)	E10KN-03010201101	4+6	yellow	6,3x0,8	3,7	23,5	8,0	0.1
NI 9,5-6/1,2 BPCV (100 SZT./PCS)	E10KN-03010201201			9,5x1,2		29,0		0.18