SPECIAL IP68



## **Electrical performance:**

CEI EN 50393 as applicable (with testing under water head and water between the cable cores)

Gel: UL 94-HB

## Halogen free:

according to CEI EN 50267 2-2

Self-extinguishing and resistant to abnormal heat and fire:

Glow wire test a +960°C according to EN 60695-2-11

Operating temperature 190°



Gel operating temperature: -60°C / +200°C






## Ready Box IP68


The 4-entrances, gel pre-filled junction box complete with connection block and glands, for 5 core cables with diameter up to 16 mm.

- Ready to use, it can be installed in all environmental conditions
- Also suitable for wet or flooded environments
- Always re-enterable
- Pre-filled with gel. Non-toxic and non-classified as hazardous under CLP
- Pre-threaded entries for cable gland mounting
- Snap shut closure, does not require screws
- Wall or external ceiling fixing system
- Halogen free & UV resistant
- No shelf life




## SPECIAL IP68

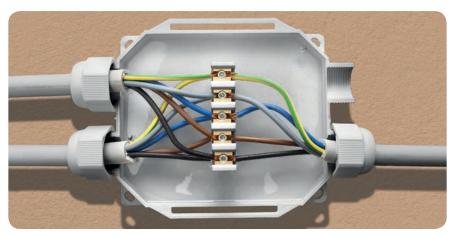









Also suitable for extra-flat lever connectors.



Gel

Also suitable for screw terminals.



Screwless closure

Insulated connection block for 5 core cables up to 6 mm<sup>2</sup>



Cable glands

Pre-threaded entries

Hole for wall mounting



